


SLIM PANEL LIGHT SQUARE (ISOLATED)



NORDUSK™
life illuminated

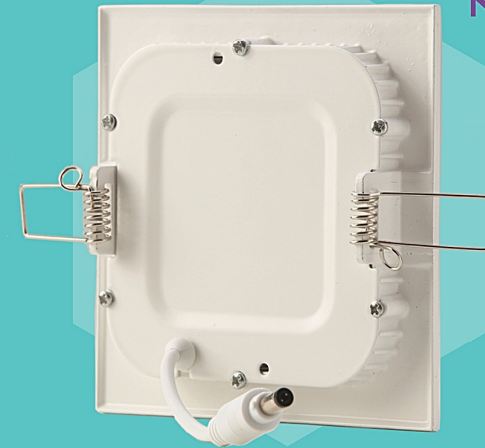

ITEM CODE	WATTAGE (W)	VOLTAGE (V)	POWER FACTOR	LUMENS (lm)	OPERATING TEMP	COLOUR	CRI	CUTOUT SIZE(mm)	LIFE (burning hrs)
KN-SPL-SQ-3W	3W	110-240V,50Hz	0.9	180lm	-10~50dg	6500K/3000K	80	70 x 70	25000
KN-SPL-SQ-6W	6W	110-240V,50Hz	0.9	390lm	-10~50dg	6500K/3000K	80	105 x 105	25000
KN-SPL-SQ-9W	9W	110-240V,50Hz	0.9	585lm	-10~50dg	6500K/3000K	80	130 x 130	25000
KN-SPL-SQ-12W	12W	110-240V,50Hz	0.9	840lm	-10~50dg	6500K/3000K	80	155 x 155	25000
KN-SPL-SQ-18W	18W	110-240V,50Hz	0.9	1260lm	-10~50dg	6500K/3000K	80	210 x 210	25000
KN-SPL-SQ-24W	24W	110-240V,50Hz	0.9	1680lm	-10~50dg	6500K/3000K	80	275 x 275	25000